

# T4058PC

Compact Utility, Series 4  
58 PS



# A compact tractor that delivers impressive function and incredible value

A compact utility tractor with premium features at an unbeatable value.



1. Refind family look hood



2. Electronic lift control



4. Auto PTO



3. Depth control and turn up / back up



5. Leveling control



6. Hook-type hydraulic top link



### 4-cylinder high-output TYM diesel engine

Equipped with a powerful 4-cylinder Stage-V engine, this tractor boasts the power of a mid-sized tractor.




### Premium cabin with full LED working light

Premium cabin introduces an LED bar-type front worklight and back side, ideal for low-light tasks and extended operational hours and enhance the productivity. Also offers spaciousness and an unobstructed view, allowing for comfortable work regardless of the weather conditions.




### Electronic hydraulic control system

The system allows for easy control of operations for 3pt-hitch control, turn/back up and draft sensitivity adjustment and giving operators full control over their task at hand.

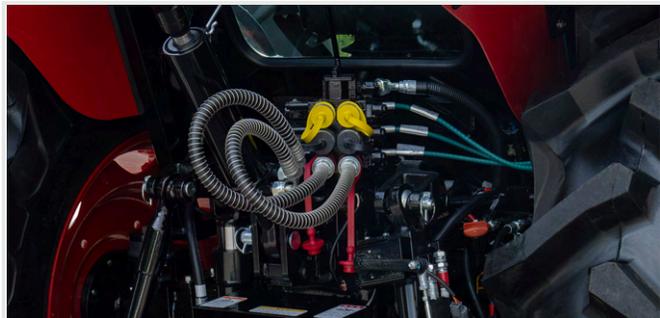

### 6-port rear external hydraulic valve & hydraulic top link

Easily attach attachments from the outside using the hydraulic top link switch. Additionally, equipped with 6 front and rear external hydraulic ports, allowing for the attachment of various attachments.

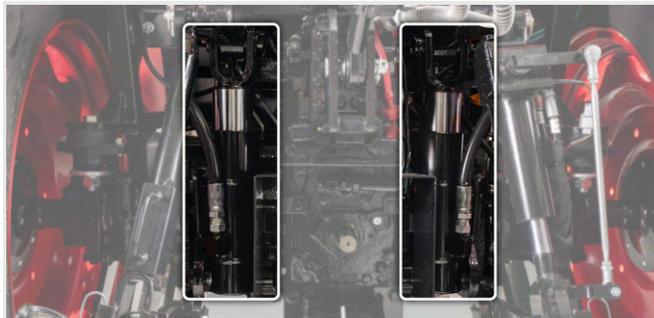

### High-capacity external hydraulic cylinder

Equipped with a high-capacity external hydraulic cylinder, enhancing lifting power and provides durability and ease of maintenance.



### Power shuttle & D-Clutch

The power shuttle and D-Clutch allow you to shift into reverse, forward, and upshift without depressing the clutch pedal, making your work more efficient and improving maneuverability.

# Technical specifications

ENGINE	
Engine manufacturer	TYM T2300T2-KT_5
Type	Turbocharger
Gross engine power	58 PS   43 kW
PTO power	48 PS   35 kW
Rated engine speed	2600 rpm
No. of cylinders	4
Displacement	2287 cc   139.5 cu. in.
Air cleaner	Dry element
Alternator	12V, 70A
Fuel system	IDI
POWERTRAIN	
Transmission type	Power shuttle
No. of speeds	F24 × R24
Max. traveling speed	38.7 km/h   24.04 mph
Brakes	Wet disc
Steering	Hydrostatic
Clutch	Wet disc
CAPACITIES	
Fuel tank	58 L   15.3 gal
Coolant	6.0 L   6.33 qt
Crankcase	4.5 L   4.75 qt
Transmission/Hydraulics system	44 L   11.62 gal
Front axle	6.4 L   6.76 qt

PTO	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540/750/1000 rpm
HYDRAULIC SYSTEM	
Pump type	Gear pump
Implement flow	43.2 L/min   11.41 gpm
Steering flow	19.44 L/min   5.13 gpm
Total flow	62.64 L/min   16.54 gpm
Category, 3-point hitch	Cat 2
Hitch lift capacity	1926 kg   4246 lb
Hitch lift capacity at 24 inches behind link ends	1367 kg   3013 lb
Lift control type	Position/Draft
No. of standard remote valves	6
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	3595 mm   141.5 in.
Overall width	1750 mm   68.89 in.
Wheelbase	2010 mm   79.13 in.
Height to top of ROPS	-
Height to top of cabin	2535 mm   99.80 in.
Min. ground clearance	460 mm   18.11 in.
Min. turn radius with brakes	(L) 2900 mm   114.17 in. / (R) 2940 mm   115.74 in.
Min. turn radius without brakes	(L) 3420 mm   134.64 in. / (R) 3490 mm   137.4 in.
Weight with ROPS	-
Weight with cab	2245 kg   4949.37 lb
Track width	F: 1365 mm / R: 1365 mm
STANDARD TIRES	
Agricultural - Front	9.5-20, 6PR
Agricultural - Rear	14.9-28, 6PR

# KJL58 Front-End Loader

## Attachments

The TYM KJL58 front-end loader raises the bar in material handling and productivity. Providing an impressive lift height and capacity, the KJL58 complements the power and performance of compatible TYM K58P compact tractors.

Lift height	3115 mm   122.6 in.
Lift capacity at pivot point (max. height)	940 kgf   2072 lb
Self leveling	Available



### CAPACITIES & REACH

Lift height	3115 mm   122.6 in.
Max. lift height under level bucket	2902 mm   114.3 in.
Clearance with bucket dumped	2422 mm   95.4 in.
Reach at maximum lift height	168 mm   6.6 in.
Max. dump angle	80°
Reach with bucket on ground	2155 mm   84.8 in.
Max. rollback angle	50°
Digging depth	130 mm   5.1 in.
Lift capacity at pivot point (max. height)	940 kgf   2072 lb
Breakout force at ground level, pivot pins	1343 kgf   2961 lb
Bucket rollback force at ground line	1556 kgf   3430 lb
Self leveling	Available
Relief valve setting (loader control valve)	165 kg/sq. cm   2347 psi
Compatible bucket sizes	66" Front-end loader bucket

### DIMENSIONS & WEIGHTS

Overall height in carry position	1670 mm   65.7 in.
Depth of Attachment (to the back of the inner shell)	549 mm   21.6 in.
Height of Attachment	510 mm   20.1 in.
Length of Attachment (to pivot pin)	665 mm   26.2 in.
Weight of boom & quick attach mechanism (1)	238 kg   525 lb
Weight of mounting frame (2)	85 kg   187 lb
Weight of bucket (3)	108 kg   238 lb
Loader total weight (1+2+3)	431 kg   950 lb
Lift cylinder	60 × 40 mm   2.4 × 1.6 in.
Bucket cylinder	60 × 35 mm   2.4 × 1.4 in.
Attachment used for specification	1570 mm   61.8 in.

### CYCLE TIMES

Boom raising time	4.5 sec
Boom lowering time	3.1 sec
Bucket rollback time	2.2 sec
Bucket dumping time	3.0 sec

### COMPATIBLE BUCKET SIZES

TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.

66" Front-End Loader bucket



# Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

[www.tym.world](http://www.tym.world)